

KSE72-1N

4921240029C



- 2
- 2
-
-
-

KSE72-1N /

“ KSE72-1N ” CE SR-1 ()

12 , 24 . KSE72-1N

4-

10

KSE72-1N

5-

(6,3 × 0,8)

START ()

RUN () ()

RUN ()

STOP ()

KSE72-1N 4 :

"OIL SW" ()

"TEMP. SW" ()

"A B" ()

J1) ()

4- ! ()

J1 CLOSED.

"J1" closed: _____

"J1" open: _____

4 :

START () (10)

FUEL/IGN. (10)

(/) “ ” SR-1

ALTERNATOR (-120)

"HORN" (10)

START () RUN () 10

10

STOP ()

: 0 ... 30
9 ... 30

20
120

: 6
: 12

"START", "FUEL/IGN." "HORN": 10
"ALTERNATOR": 120

420

10 ± 2

2

- 10...+ 55°C (); - 25..+ 70 C (); - 40..+ 70 C ()

HSE, DIN 40040

3..30 : 100 / .., 30..100 : 1,9 g; GL + LR: 1 DNV: B



15 g, 6 3- ; 68-2-27, : Ea.

EN 50081-1/2, EN 50082-1/2, SS4361503 (PL4), 255-22-1 (3).

UL94 (V0).

, 6.3 × 0.8

IP41, 529 EN 60529.

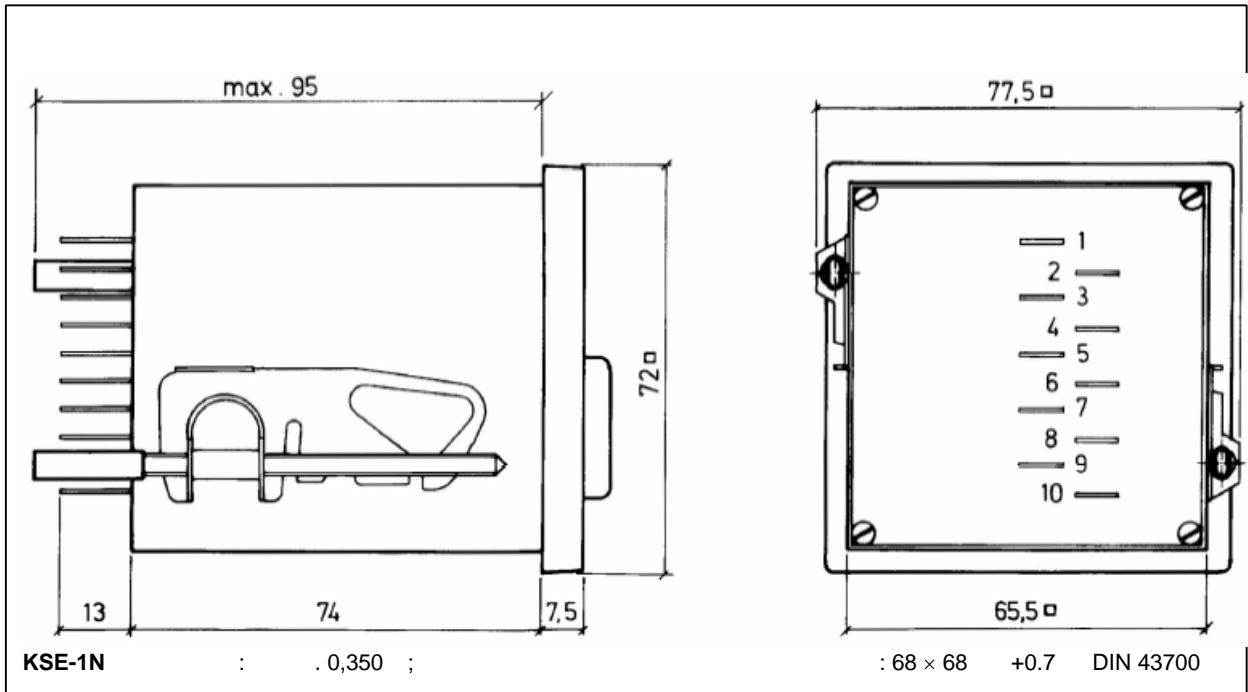

DEIF A/S, Frisenborgvej 33
DK-7800 Skive, Denmark

Tel.: +45 9614 9614, Fax: +45 9614 9615
E-mail: deif@deif.com, URL: www.deif.com

