


DCP2

/

- DIN
- 5 – 10 – 20 – 40
- , < 100

4921210105B

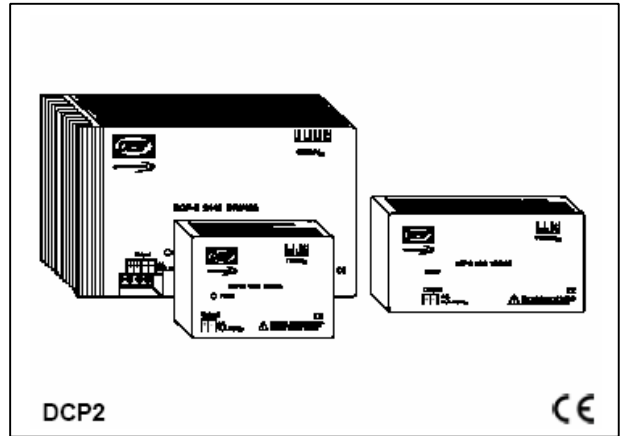

DCP2

10 20 40

DCP2


DCP2

24 (12 )

DCP2

DCP2

Выходное напряжение

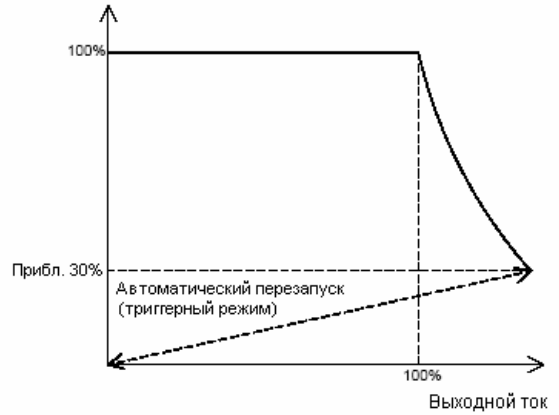

5

DCP2

DCP2

DCP2.

DCP2

DCP2


27,5 (DC)

11,8-13,8V (DC) ( )

23,5-

DCP2

Выходное напряжение

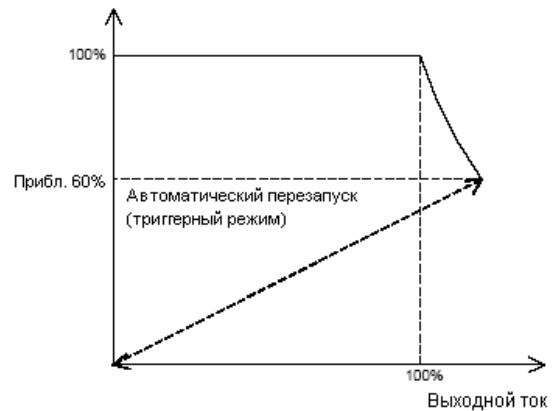

DCP2. 2,1 12

( . . 12,6 25,2 24 ).

30°C 2,25 12 -


24 - 13,5 (2,25 × 6 ), - 27 (2,25 × 12 ).

13,4 26,8 12 . 24

DCP2.

( . . > 60°C ).

( . . ) .

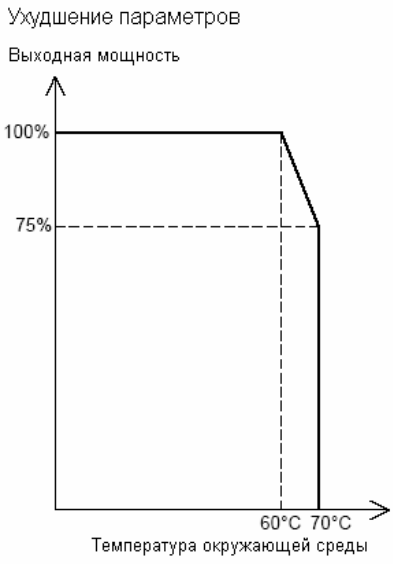



EMC:

EN 61000-6-3  
 EN 61000-6-4  
 EN 61000-6-1  
 EN 61000-6-2  
 EN 61000-6-5

UL94 (V0)

DCP2-2440

VDE0875 T11 / EN55011 ( B)

147 × 123 × 86 DCP2-1205, -2405  
 205 × 123 × 86 DCP2-1210, -2410  
 240 × 153 × 86 DCP2-2420  
 292 × 185 × 130 DCP2-2440  
 100 DCP2  
 30

(ESD) 8  
 1000-4-2  
 10  
 - 10 / , 1000-4-3  
 1000-4-4  
 4  
 2

DIN, EN 50022-35

- 1000-4-5 DCP2-1205 . 0,8  
 4 DCP2-2405 . 0,8  
 4 DCP2-1210 . 1,2  
 - 4,0 - 50 - 1 DCP2-2410 . 1,2  
 : 1,5 (DC) ./ DCP2-2420 . 1,9  
 1,5 (DC) ./ DCP2-2440 . 3,6  
 0,5 (DC) ./

VDE0805 / EN60950 / 950

1  
 IP20  
 < 0,75 ( 47 - 63 )  
 < 3,5 ( DCP2-2420 DCP2-2440)  
 0 ... 70°C ( , )  
 - 25... 85°C ( )  
 2,5% /K°  
 +60°C

: DCP2 - 24 (DC) - 5 (DC)

DCP2-1205, -1210, -2405 -2410  
 - 2,5 2  
 - 2,5 2  
 DCP2-2420  
 - 2,5 2  
 - 4,0 2  
 DCP2-2440  
 - 2,5 2  
 - 10,0 2



DEIF A/S, Frisenborgvej 33  
 DK-7800 Skive, Denmark  
 Tel.: +45 9614 9614, Fax: +45 9614 9615  
 E-mail: deif@deif.com. URL: www.deif.com

